

Worst-Case Execution Time Calculation for Query-Based Monitors by Witness Generation

MÁRTON BÚR, McGill University, Canada

KRISTÓF MARUSSY, Budapest University of Technology and Economics, Hungary

BRETT H. MEYER, McGill University, Canada

DÁNIEL VARRÓ, McGill University, Canada and Budapest University of Technology and Economics, Hungary

Runtime monitoring plays a key role in the assurance of modern intelligent cyber-physical systems, which are frequently data-intensive and safety-critical. While graph queries can serve as an expressive yet formally precise specification language to capture the safety properties of interest, there are no timeliness guarantees for such auto-generated runtime monitoring programs, which prevents their use in a real-time setting. The main challenge is that the worst-case execution time (WCET) bounds provided by current static WCET computation methods for such programs can only provide very conservative and impractical estimations, which would result in wasteful resource allocation or inadequate scheduling of monitors. This paper presents a WCET analysis method for data-driven monitoring programs derived from graph queries. The method incorporates results obtained from low-level timing analysis into the objective function of a modern graph solver. This allows the systematic generation of input graph models up to a specified size (referred to as *witness models*) for which the monitor is expected to take the most time to complete. Hence the estimated execution time of the monitors on these graphs can be considered as safe WCET. Moreover, in case the runtime graph model outgrows the size that was used to determine WCET at design time, our approach provides a fast but more conservative recomputation of safe execution time bounds on-the-fly using runtime model statistics. The benefit is that such on-line WCET estimation is still comparable to the one which solely relies on traditional approaches. Finally, we perform experiments with query-based programs executed in a real-time platform over a set of generated models to investigate the relationship between execution times and their estimates, and we compare WCETs obtained with the different approaches.

CCS Concepts: • **Computer systems organization** → **Real-time system specification**; • **Software and its engineering** → *Automated static analysis*; Model-driven software engineering.

Additional Key Words and Phrases: real-time systems, worst-case execution time analysis, graph queries, model generation

ACM Reference Format:

Márton Búr, Kristóf Marussy, Brett H. Meyer, and Dániel Varró. 2021. Worst-Case Execution Time Calculation for Query-Based Monitors by Witness Generation. *J. ACM* 37, 4, Article 111 (August 2021), 29 pages. <https://doi.org/10.1145/1122445.1122456>

Authors' addresses: Márton Búr, marton.bur@mail.mcgill.ca, McGill University, 3480 Rue University, Montreal, Quebec, H3A 2K6, Canada; Kristóf Marussy, marussy@mit.bme.hu, Budapest University of Technology and Economics, Magyar tudósok körútja 2, Budapest, 1117, Hungary; Brett H. Meyer, brett.meyer@mcgill.ca, McGill University, Canada; Dániel Varró, daniel.varro@mcgill.ca, McGill University, Canada, Budapest University of Technology and Economics, Hungary.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

© 2021 Copyright held by the owner/author(s).

Manuscript submitted to ACM

Manuscript submitted to ACM

1 INTRODUCTION

Runtime monitoring has become a key technique in the assurance of safety-critical and intelligent cyber-physical systems (CPS) such as autonomous vehicles [38] (e.g., self-driving cars, drones) where traditional upfront design time verification is problematic due to the dynamically changing environment and the data-intensive nature of the system. Runtime monitoring programs execute as part of the system to analyze events and execution traces [5] in order to detect potentially critical situations. Since this requires formal precision to capture safety requirements, logic-based formalisms (e.g., propositional logic, temporal logic) are frequently used to specify sequences that violate a requirement. Furthermore, monitoring programs can be automatically synthesized from such specifications that are ready to be used in traditional hard real-time systems without compromising task schedulability and real-time properties of the existing program [25, 39].

Unfortunately, existing runtime monitoring approaches used in safety-critical applications have some major limitations, which are increasingly problematic for the new generation of data-intensive, intelligent, and self-adaptive, yet safety-critical CPSs. First, *the expressiveness of the specification language is considered moderate* [24], which hinders both description and comprehension of complex rules by engineers. Moreover, safety-critical programs typically use statically allocated data with bounded input sizes and they conservatively avoid many programming language constructs.

Recent advances in runtime monitoring aim to overcome these limitations by (1) offering high-level and expressive query-based [10] or rule-based [24] formalisms to capture the properties to be monitored, and (2) using runtime graph models as an in-memory knowledge base which capture dynamic changes in the system or its environment on a high-level of abstraction [10, 23]. As a key conceptual benefit, such approaches enable the development of *data-driven safety monitors* (instead of event-driven ones) where aggregated changes triggered by complex sequences of atomic events can be detected directly over an evolving data model. Such automatically synthesized monitoring programs use complex data structures and complicated control flow.

When a safety-critical program is executed in a hard real-time environment, both correct and timely execution is essential, otherwise an error or a deadline miss can lead to catastrophic consequences [40]. For this reason, correctness is typically addressed by rigorous testing or formal verification while worst-case execution time (WCET) analysis is employed to compute a safe upper bound of maximum required execution time for a function.

While recent research has investigated data-driven runtime monitors for intelligent and safety-critical CPSs in a distributed environment [9, 18, 23], and various testing approaches have been proposed [1, 42], the timeliness aspect of the problem has been neglected. In fact, only very few initial ideas are available [11, 48].

In order to obtain practical WCET bounds for data-driven runtime monitors that are safe and tight, major challenges in timing analysis need to be tackled. First, detailed information is needed about the executable binary and execution platform, including precise memory, pipeline, and cache descriptions. Moreover, determining the WCET for a generic program traces back to solving the halting problem, thus existing WCET computation approaches prohibit the use of certain programming constructs. Furthermore, programs using dynamic memory allocation are not supported by current analysis tools because of the non-deterministic features of the allocation process would make safe WCET estimations highly pessimistic and thus impractical [26]. Finally, the domain-specific relationships among data entities pose several nontrivial restrictions on the program flow facts, i.e., it is common that the longest program path provided by a static analysis is infeasible. This additional information largely helps to reduce safe WCET bounds; however, there is no generally applicable method to efficiently exploit information about data flow during timing analysis.

Contributions. This paper aims to address WCET estimation in the very challenging setting of data-driven runtime monitoring programs. Such monitors can be automatically derived from high-level graph query specifications and are evaluated over dynamically changing graph models as data structures used in real-time systems. In particular, the paper makes the following contributions.

- (1) We adapt data-driven runtime monitoring programs derived from high-level graph query specifications [9] to real-time platforms.
- (2) We provide an algorithm for static analysis for monitoring programs to estimate execution time on a given runtime model snapshot.
- (3) By using an existing graph solver, we derive witness models which exhibit theoretical WCET bounds for graph query programs up to a predefined model size.
- (4) We adapt a symbolic WCET analysis approach [4] for graph query programs and exploit model statistics to provide a coarse but still practical estimate for runtime models that are larger than the ones covered by static estimations.
- (5) We perform an extensive experimental assessment of query evaluation times over a variety of graph models executed on a real-time platform, and we compare the results with the different WCET estimates.

Data-driven runtime monitoring programs derived from graph queries differ substantially from traditional safety-critical programs by using complex graph data structures and complex algorithms. Up to our best knowledge, this is the first approach to provide precise WCET analysis of query-based runtime monitors by exploiting state-of-the-art model generation techniques and model statistics. This enables the use of such programs in a real-time context by providing practical yet conservative WCET estimates that can be dynamically maintained and recomputed at runtime to reallocate time slots upon significant changes in the underlying graph model.

The outline of the paper is as follows. In Section 2, we present a smart railway system as a motivating example for query-based monitoring which is followed by the conceptual foundations of runtime graph models, graph queries, and model generation. Section 3 provides an overview of query-based runtime monitors. Section 4 describes the adaptation of graph queries to real-time systems. Performance evaluation of embedded query programs and worst case execution time computation for the case-study is discussed in Section 5. Related works are introduced in Section 6, while Section 7 concludes the paper.

2 CONCEPTUAL BACKGROUND

This section overviews the core concepts of data-driven runtime monitors and revisits the foundations of domain-specific graph model generation. High-level rule-based specification languages [9, 18, 24] have been recently proposed to specify safety criteria for runtime monitors using either an event stream [24] or a runtime graph model (aka *models@run.time*) [9, 18] as underlying knowledge representation. Moreover, recent results in model generation allow systematic generation of domain specific models that fulfill a given set of well-formedness criteria [42].

2.1 Runtime safety monitors in a CPS demonstrator

We illustrate high-level distributed runtime models and query-based data-driven monitors in the context of the open source *Model-Based Demonstrator for Smart and Safe Cyber-Physical Systems* (MoDeS3) [51] educational platform, which showcases various challenges of modern intelligent but safety-critical CPS applications. Figure 1 presents a self-contained excerpt of the demonstrator that is a model railway system with an added layer of safety to prevent

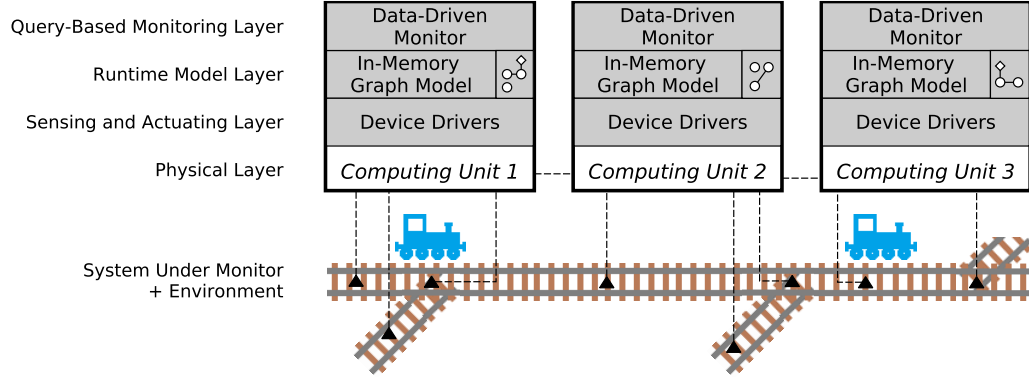


Fig. 1. Runtime monitoring by graph queries

trains from collision and derailment using runtime safety monitors. The railway track is equipped with several sensors and actuators indicated with black triangles in the lower part of Figure 1. Train shunt detectors are capable of sensing trains when they move on to a particular segment of the track, while turnout equipments allow reading and setting the directions of the associated turnout.

The system is managed by a distributed monitoring service running on a network of heterogeneous computing units, such as Arduinos, Raspberry Pis, BeagleBone Blacks, etc. Relevant runtime information gained from sensor reads (e.g., the occupancy of a segment, or the status of a turnout) is uniformly captured in an in-memory *runtime graph model*, which is also deployed on the platform. Safety monitors are formally captured as *graph queries* (which are frequently used for checking design time consistency constraints in design tools of various embedded systems). Alerts from the monitoring services may trigger control commands of actuators (e.g., to change turnout direction) to guarantee safe operation. The monitoring and control programs are running in a real-time setting on the computing units.

While the MoDeS3 platform can demonstrate various challenges of CPSs, this paper exclusively focuses on the real-time aspect of the runtime monitoring service which is deployed to some embedded devices with limited resources (memory, CPU, etc.). In particular, our aim is to compute tight WCET estimations for complex runtime monitoring programs based on graph queries evaluated over a runtime graph model running on a single computing unit. We accomplish this by building atop existing symbolic WCET analysis methods and advanced graph model generation techniques.

2.2 Graph Models at Runtime

The *models@run.time* paradigm [7] places models at the center of contemporary cyber-physical and self-adaptive systems in order to efficiently capture runtime information about the system and its environment. In this work, we rely on (typed and directed) *graph models* used as a knowledge base at runtime for the monitored system. Such graphs are dynamically changing in-memory data structures which encode domain-specific instance models typed over a domain metamodel. A runtime (instance) model captures a snapshot of the underlying system in operation [7, 45].

Relevant changes in the system are reflected in the runtime model (in an event-driven or time-triggered way) and operations executed on the runtime model (e.g., setting values of controllable attributes of objects or updating links between objects) are reflected in the system itself (e.g., by executing scripts or calling services).

2.2.1 Metamodels and instance models. The core concepts (classes) in a domain and the relations (references) between those concepts are often captured in a *metamodel*. In this paper, we formally capture metamodels by a logic signature and instance models as logic structures following [34].

Definition 2.1. A *metamodel* is formally represented as a logic signature $\Sigma = \{C_1, \dots, C_l, R_1, \dots, R_m\}$, where $\{C_i\}_{i=1}^l$ are unary *class symbols* and $\{R_j\}_{j=1}^m$ are binary *relation symbols*.

The definition of metamodel can include binary *attribute symbols* such as in [10]. However, their handling is analogous to binary relation symbols, thus their discussion is excluded from here.

Definition 2.2. An *instance model* over a metamodel Σ is a logic structure $M = \langle O_M, I_M \rangle$ where O_M is a finite set of domain objects in M and I_M provides interpretations for the class and reference predicates in Σ such that $I_M(C_i) \subseteq O_M$ is the set of objects of type C_i for each $C_i \in \Sigma$, and $I_M(R_j) \subseteq O_M \times O_M$ is the set of relation links of type R_j for each $R_j \in \Sigma$.

To provide a condensed characterization of instance models, we will collect various *model statistics* at runtime. For simplicity, we will restrict our attention to the type distributions (number of objects of each type).

Definition 2.3. The *model statistics* for an instance model M is a function $stats_M: \{C_1, \dots, C_l\} \rightarrow \mathbb{N}$ which denotes the number of objects of type C_i , i.e. $stats_M(C_i) = |I_M(C_i)|$.

Example 2.4. An excerpt of the MoDeS3 metamodel with metamodel constraints is shown in Figure 2(a) using the Eclipse Modeling Framework (EMF) notation [47]. A model has exactly one Modes3ModelRoot that contains all other objects within the model (as indicated by the containment references). One domain concept is Train. Class Segment represents a section of the railway track with the connectedTo reference which describes what other segments it is linked to (up to two). Moreover, each train maintains a location reference to a segment to describe its current position. Likewise, instances of the Segment class also maintain a reference occupiedBy to express if they are currently occupied by a train. Moreover, a specialized Segment is a Turnout that can change its connections between straight and divergent segments. In this example, $\{\text{Modes3ModelRoot}, \text{Train}, \text{Segment}, \text{Turnout}\} \subset \Sigma$ are unary class predicates, while $\{\text{Location}, \text{OccupiedBy}, \text{ConnectedTo}, \text{Straight}, \text{Divergent}, \text{Trains}, \text{Segments}, \text{Turnouts}\} \subset \Sigma$ are binary reference predicates.

Figure 2(b) shows a graphical presentation of an instance model, i.e. a snapshot of the MoDeS3 runtime model with the following model statistics. The graph has a total of 12 objects. There are 9 Segment instances with their respective connectedTo references and two of them are also instances of Turnout. The turnout represented by tu_0 is capable of switching between segments s_2 and s_4 , while tu_1 is capable of switching between segments s_3 and s_4 . Additionally, there are three different trains on the track $tr_{0...2}$ with their respective locations being s_6 , s_0 , and s_2 .

2.2.2 First-order logic predicates for queries over graph models. The formal definitions of metamodel and instance model enable the formulation of first-order logic (FOL) predicates, which can be evaluated as *graph queries* over the logic structure of an instance model.

Informally, base predicates check either for equality or for the existence of certain objects and references of a respective type (predicate) in the underlying runtime model. Then complex predicates are derived by traditional FOL connectives (e.g. not, exists, forall, and, or).

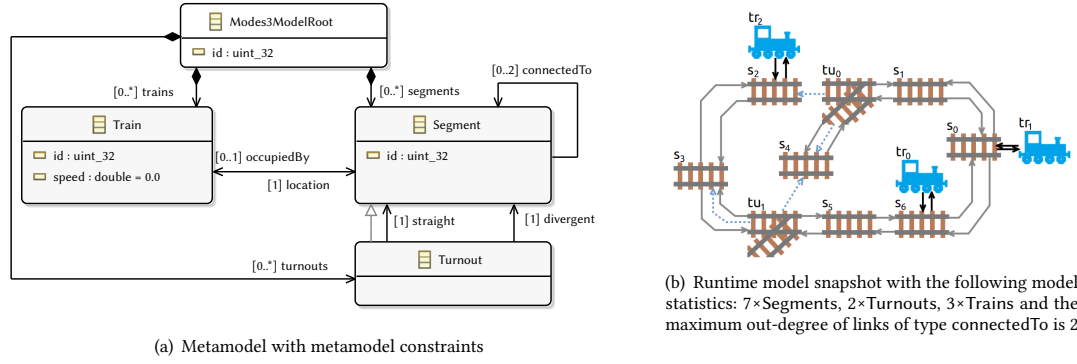


Fig. 2. The MoDeS3 metamodel and instance model

Definition 2.5. A *first-order logic predicate* (or *query*) φ , where v_1, \dots, v_n denote free variables (not appearing in any quantifiers) of φ can be evaluated over a instance model M along a *variable binding* $Z: \{v_1, \dots, v_n\} \rightarrow O_M$ (denoted as $\llbracket \varphi \rrbracket_Z^M$) to return either *true* (1) or *false* (0) as follows:

$$\begin{aligned}
 \llbracket 1 \rrbracket_Z^M &:= 1 & \llbracket 0 \rrbracket_Z^M &:= 0 \\
 \llbracket C_i(v) \rrbracket_Z^M &:= 1 \text{ iff } Z(v) \in I_M(C_i) & \llbracket R_j(v, v') \rrbracket_Z^M &:= 1 \text{ iff } \langle Z(v), Z(v') \rangle \in I_M(R_j) \\
 \llbracket v = v' \rrbracket_Z^M &:= 1 \text{ iff } Z(v) = Z(v') & \llbracket \neg \varphi \rrbracket_Z^M &:= 1 - \llbracket \varphi \rrbracket_Z^M \\
 \llbracket \exists v : \varphi \rrbracket_Z^M &:= \bigvee_{x \in O_M} \llbracket \varphi \rrbracket_{Z, v \mapsto x}^M & \llbracket \forall v : \varphi \rrbracket_Z^M &:= \bigwedge_{x \in O_M} \llbracket \varphi \rrbracket_{Z, v \mapsto x}^M \\
 \llbracket \varphi_1 \vee \varphi_2 \rrbracket_Z^M &:= \llbracket \varphi_1 \rrbracket_Z^M \vee \llbracket \varphi_2 \rrbracket_Z^M & \llbracket \varphi_1 \wedge \varphi_2 \rrbracket_Z^M &:= \llbracket \varphi_1 \rrbracket_Z^M \wedge \llbracket \varphi_2 \rrbracket_Z^M
 \end{aligned}$$

Definition 2.6. *Predicate / query evaluation* aims to find a variable binding $Z: \{v_1, \dots, v_n\} \rightarrow O_M$ for a predicate φ that maps all free variables of the predicate to objects of M such that the predicate evaluates to *true*, i.e., $\llbracket \varphi \rrbracket_Z^M = 1$.

Definition 2.7. The *match set* of a query predicate φ with free variables v_1, \dots, v_n is the set

$$\text{Matches}(M, \varphi) = \{Z: \{v_1, \dots, v_n\} \rightarrow O_M \mid \llbracket \varphi \rrbracket_Z^M = 1\}.$$

One element in this set is called a *match*, while $|\text{Matches}(M, \varphi)|$ denotes the size of the match set.

Note that in our context, a match of a query will typically represent a violation of a well-formedness constraint of the domain or a hazardous situation with respect to a safety property.

2.2.3 Metamodel and well-formedness constraints. A domain metamodel is frequently complemented in practice with additional metamodel and well-formedness constraints to restrict the possible relationships between domain concepts. *Metamodel constraints* can be captured by FOL predicates and categorized as follows [34].

- i. A **type hierarchy constraint** defines a type system by *supertype* relations. For each object o , there shall be a single class C , such that for any class object o is instance of C' iff C' is a supertype of C .
- ii. A **type compliance constraint** restricts the classes C_1 and C_2 of objects at the ends of a reference R .
- iii. A **multiplicity constraint** may be placed on lower bounds on the number of references adjacent to an object o .
- iv. An **inverse relation constraint** prescribes that references R and R' always occur in pairs.

- v. A **containment hierarchy constraint** ensures that models are arranged in a strict tree hierarchy via the *containment references* starting from a root object.

Example 2.8. The formula φ_{LM} illustrates a constraint of the metamodel for *location multiplicity* (LM). This formula evaluates to 1 for an object passed as a parameter if it is of type Train and it does not have exactly one segment as its location (i.e., has zero or more than one). A query can be defined with the following formula: $\varphi_{LM}(t) = \text{Train}(t) \wedge (\neg(\exists s_1, s_2 : \text{Location}(t, s_1) \wedge \text{Location}(t, s_2) \rightarrow s_1 = s_2) \vee \neg(\exists s : \text{Location}(t, s)))$.

In this work, we are interested in the timing analysis of monitors that take well-formed models as their input. Such additional *well-formedness constraints* of the domain can also be captured by FOL predicates [42, 43]. When a constraint is formalized as a FOL predicate, it captures erroneous model fragments. As such, we expect that the respective FOL predicate has empty match sets in a model. Formally, if a well-formedness constraint captured by FOL predicate φ , then $\text{Matches}(M, \varphi) = \emptyset$ for all well-formed instance models M .

Example 2.9. The metamodel constraints of the MoDeS3 domain shown in Figure 2(a) allow the creation of a model that have no real-life counterparts. For example, metamodel constraints allow the creation of a Turnout that has two *connectedTo* references to two distinct Segments, but none of these Segments are the continuation of the Turnout in the straight or divergent directions. Such a turnout in an instance model would represent a physically impossible situation, therefore we exclude such cases from our analysis by introducing a well-formedness constraint captured by the following FOL predicate: $\varphi_{SD}(t) = \exists s_1, s_2 : \text{ConnectedTo}(t, s_1) \wedge \text{ConnectedTo}(t, s_2) \wedge \neg(s_1 = s_2) \wedge \neg(\text{Straight}(t, s_1) \vee \text{Straight}(t, s_2) \vee \text{Divergent}(t, s_1) \vee \text{Divergent}(t, s_2))$.

2.3 Data-driven runtime monitors by graph queries

Graph queries have been proposed to specify safety properties for runtime monitoring in [9] on a high level of abstraction by focusing on structural dependencies between system entities. Informally, a graph query captures a potentially unsafe situation that may occur at runtime. In this work, we use FOL predicates to define graph queries over instance models. Similarly, the OCL standard has been used in [30] for similar purposes.

Graph queries of runtime monitors are *evaluated over a runtime model which reflects the current state of the monitored system*, e.g. data received from different sensors, the services allocated to computing units, or the health information of computing infrastructure. In accordance with the *models@run.time* paradigm [7, 45], observable changes of the real system gets updated — either periodically with a certain frequency, or in an event-driven way upon certain triggers.


Monitors formalized as a FOL predicates capture potentially unsafe cases represented in a runtime model. If a runtime monitoring goal captured by the FOL predicate φ , then the elements of $\text{Matches}(M, \varphi)$ contain all objects from M where immediate action is required to avoid failures.

Classical *event-based runtime monitors* rely on some temporal logic formalism to detect sequences of events occurring in the system at different points in time, while the underlying data model used in such monitors is restricted to atomic propositions. On the other hand, *data-driven runtime monitors* defined by graph queries can check structural properties of a runtime model that represents a snapshot of the underlying system. In other words, they focus on the data available on the underlying system at a given point of time (rather than detecting the sequence of events that evolved the system into the particular state).

As such, event-based and data-driven monitors are complementary techniques. While graph queries can be extended to express temporal behavior [17], our current work is restricted to (structural) safety properties where the violation of a property is expressible by graph queries.

$$\varphi_{MT}(mt, t) = \exists loc : \text{OccupiedBy}(loc, t) \wedge \text{Turnout}(mt) \wedge \text{Straight}(mt, loc) \wedge \neg \text{ConnectedTo}(loc, mt)$$

(a) Graph query as logic predicate

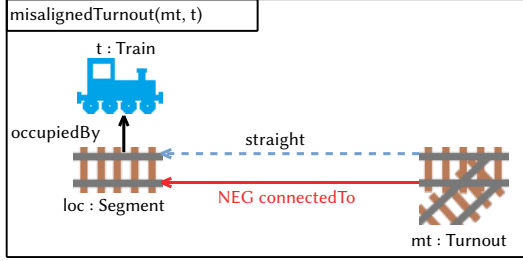

(b) Graphical query presentation

```

1 pattern misalignedTurnout(mt, t) {
2   Segment.occupiedBy(loc, t);
3   Turnout(mt);
4   Turnout.straight(mt, loc);
5   neg find connected(loc, mt);
6 }
7 private pattern connected(s1, s2) {
8   Segment.connectedTo(s1, s2);
9 }

```

(c) Description of a query and its subquery in VQL

Fig. 3. Monitoring goal formulated as a graph query φ_{MT} for misalignedTurnout

Example 2.10. On a railway track, a *misaligned turnout* (MT) refers to a state where a turnout is set to a direction that differs from the direction of an incoming train. Trains passing through such misaligned turnouts can damage the railway equipment and can lead to derailment [36]. Query φ_{MT} shown in Figure 3(a) captures a (simplified) hazardous case and identifies violating situations. The query returns pairs of trains t and turnouts mt where the train is located on a segment loc that is the straight continuation of the turnout, but the turnout is currently not connected to this segment. Any match of this query highlights a train and a turnout where immediate action (stop the train or switch the direction of the turnout) is required. Figure 3(b) shows the same graph query in graphical presentation (used in modeling tools). Listing 3(c) shows the textual description of φ_{MT} using VIATRA Query Language (VQL) [6], which is a graph query language often used in CPS design tools. The expressiveness of the VQL converges to first-order logic with transitive closure, thus it provides a rich language for capturing a variety of complex structural conditions and dependencies between various entities in a graph model.

2.4 Model generation problems

Automated synthesis of domain-specific graph models has been actively researched in the field of model-based software engineering [8, 20, 42, 44]. Hereby, we revisit some core concepts.

A model generation task takes the following four required inputs:

- A *metamodel* $\Sigma = \{C_1, \dots, C_l, R_1, \dots, R_m\}$ with class and reference predicate symbols.
- A *theory* of constraints $\mathcal{T} = \{\varphi_1, \dots, \varphi_n\}$ expressed as FOL (*error*) *predicates*.
- *Type scopes* $\mathcal{S}: \{C_1, \dots, C_k\} \rightarrow \mathbb{IV}_{\mathbb{N}}$, where $\mathbb{IV}_{\mathbb{N}}$ is the set of natural number intervals. Type scopes specify the minimum and the maximum number of instances of objects by type, i.e., if $\mathcal{S}(C_i) = [L_i, U_i]$, then solution models must contain at least L_i and at most U_i instances of the class $C_i \in \Sigma$.
- An *objective function* which is a linear function that assigns a real number to a model based on the number of matches for selected predicates and assigned weights. Formally, a linear objective function is $f(M) = \sum_{i=1}^n |\text{Matches}(M, \psi_i)| \cdot w_i$, where ψ_i are predicates and $w_i \in \mathbb{Z}$ are weights.

Definition 2.11. An instance model M *satisfies* theory \mathcal{T} and the type scopes \mathcal{S} , written as $\mathcal{T}, \mathcal{S} \models M$, if

- no constraints are violated, i.e. for all error predicates $\varphi \in \mathcal{T}$: $\text{Matches}(M, \varphi) = \emptyset$, and

- the number of model elements of a specific type satisfy the type scope (written as $\mathcal{S} \models \text{stats}_M$); formally, for all class symbols $C_i \in \Sigma$, $\text{stats}_M(C_i) \in \mathcal{S}(C_i)$.

Definition 2.12. The solution of the model generation task is a set of models that are instances of the input metamodel, satisfy all constraints, and respect the provided type scopes:

$$\text{solutions}(\Sigma, \mathcal{T}, \mathcal{S}) = \{M \mid M \text{ is an instance of the metamodel } \Sigma \text{ and } \mathcal{T}, \mathcal{S} \models M\}.$$

Definition 2.13. The optimal solutions of the model generation are solution models that maximize the value of the linear objective function.

$$\text{optimal}(\Sigma, \mathcal{T}, \mathcal{S}, f) = \{M \in \text{solutions}(\Sigma, \mathcal{T}, \mathcal{S}) \mid \forall M' \in \text{solutions}(\Sigma, \mathcal{T}, \mathcal{S}) : f(M') \leq f(M)\}.$$

Our work relies on the model generator presented in [42] which was proved to be complete and sound in [49]. Informally, it is able to derive all instance models in a domain (up to a designated size defined by the scopes) which satisfy the constraints.

3 QUERY-BASED RUNTIME MONITORS

The implementation of runtime models and graph queries requires extra attention to facilitate the timing analysis of query-based monitoring programs. This section overviews our assumptions and requirements about the practical application of the theoretical background introduced in Section 2.

3.1 Graph data structures in embedded systems

For data-driven monitors, the structure of the underlying graph model directly impacts the performance of query evaluation. Since an embedded device may have limited available CPU and memory resources, a lightweight data structure is needed to efficiently capture runtime graph models. While the in-depth discussion of such a graph data structure is out of scope for this paper, we make the following assumptions about the supported operations of the underlying graph:

- **Dynamic element creation and deletion.** The runtime model serves as the knowledge base about the underlying system and its environment. For this reason, it needs to accommodate graph models without a theoretical a priori upper bound for model size. Based on [26], one way to support this is to allocate the maximum amount of memory that is physically possible to be used for storing the graph. However, only the allocated memory is determined at compile time, the type (and distribution) of objects stored in the graph is runtime information.
- **Maintenance of model statistics.** As objects in the graph model are created and deleted, high-level model statistics [50] such as the number of instances of each type (i.e., class and reference) in the model should be maintained continuously to allow real-time access to them.
- **Indexing of objects by type using unique identifiers.** As query evaluation typically starts by iterating over all elements of a given type or accessing specific objects, it necessitates efficient object access, e.g. by maintaining a real-time index for memory resident data [16].
- **Navigability along edges.** Many steps in query evaluation navigate along the edges (references) of selected objects to find further appropriate variable substitutions for unbound query variables. A simple way to support this feature is by, e.g., maintaining direct pointers in the objects to reachable objects.

```

1 typedef struct {
2     uint16_t segment_id;
3     Train *train;
4     Segment *connected_to[2];
5     uint8_t connected_to_count;
6 } Segment;
7
8 typedef struct {
9     uint16_t train_id;
10    double speed;
11    Segment *location;
12 } Train;

```

Listing 1. Classes of the MoDeS3 domain

```

1 typedef union {
2     Segment segment;
3     Train train;
4 } Object;
5
6 struct Modes3ModelRoot {
7     Object objects[SEGMENTS + TRAINS];
8     uint16_t object_count;
9     uint16_t segments[SEGMENTS];
10    uint16_t segment_count;
11    uint16_t trains[TRAINS];
12    uint16_t train_count;
13 } runtime_model;

```

Listing 2. Generic graph object and model root

Fig. 4. Example implementation of a generic graph data structure with Segment and Turnout domain classes

Example 3.1. Listing 1 shows a possible C implementation of data structures for Segment and Train classes present in the metamodel depicted in Figure 2(a). Lines 2, 9 and 10 are fields created from respective attributes. For each type, an globally unique id attribute that encodes the type of the object is mandatory for indexing and model manipulation. Furthermore, in this example, we implement references (i.e., links in the graph model) as pointers (line 11) or pointer arrays with sizes (lines 4 and 5). Representing links between objects with pointers is highly efficient from a performance viewpoint.

Listing 2 shows how a graph model container Modes3ModelRoot (lines 5-12) can allocate static memory for generic graph objects represented by the union type Object (lines 1-4) in C. Runtime model statistics are captured by the counters in lines 7, 9, and 11. The maximum used memory by the graph is preallocated in line 6 by the objects array which has a length of the sum of maximum expected number of trains (denoted by the constant TRAINS) and the maximum expected number of segments (SEGMENTS). At the same time, the arrays segments (line 9) and trains (line 11) keep track of the *indexes* of the respective objects within the objects array. The use of these two latter data structures is to facilitate model updates: the id attributes of a given model object is used to index these arrays (these unique identifiers encode the type of the object, i.e., which array should be indexed) and obtain their position in the objects array.

3.2 Real-time graph query programs

3.2.1 Local search-based graph query evaluation. Graph query evaluation (aka graph pattern matching) is the process of finding all matches of a query over a specific model [50]. When query evaluation is initiated, the initial empty variable binding is gradually extended to retrieve all matches from the entire model.

Various query evaluation strategies exist in literature [21]. Our runtime monitoring framework uses a *local search-based query evaluation* strategy to find matches of monitoring queries based on [50]. To obtain efficient performance at runtime, query evaluation is guided by a *search plan* [50], which maps each constraint in the query to a single pair of $\langle \text{Stepnumber}, \text{Operationtype} \rangle$. In this tuple, the first value specifies the order in which query evaluation should attempt to satisfy the respective constraint. The second value can be either *extend* or *check*, depending on the current binding of constraint variables (to objects in the runtime model) while the constraint is enforced:

- An **extend operation** evaluates a constraint with at least one free variable. Execution of such operations requires iterating over all potential variable substitutions and selecting the ones for which the constraint evaluates to 1.

Algorithm 1: Code generation from search plans

```

1 Function CompileSearchPlan(sp, idx) is
2   if idx > sp.size() then return code for storing a match;
3   step = sp[idx]
4   matcherCode = ""
5   if step is extend then
6     for uv ∈ step.getFreeVariables() do
7       matcherCode +=
8         AddLoopFor(uv, step.getConstraintFor(uv))
9     end
10  else if step is check then
11    matcherCode +=
12      AddIfFor(step.getAllVariables(), step.getConstraint())
13  end
14  return matcherCode + CompileSearchPlan(sp, idx + 1)
15 end

```

Table 1. A possible search plan for query misaligned-Turnout where free variables are underlined>

Constraint	Step#	Op. type
Turnout (<u>mt</u>)	1	extend
Straight (<u>mt</u> , <u>loc</u>)	2	extend
¬ConnectedTo (<u>loc</u> , <u>mt</u>)	3	check
OccupiedBy (<u>loc</u> , <u>t</u>)	4	extend

- A **check operation** evaluates a constraint with only bound variables. Execution of such operations determines if the constraint evaluates to 1 over the actual variable binding.

Constructing effective search plans for graph queries is a complex challenge. It is outside of the scope of the current paper and has been formerly extensively studied (see, e.g., [28, 50] for possible solutions). However, we present a pseudo code that generates embedded query code from a search plan in algorithm 1. The *CompileSearchPlan* function is parameterized with a search plan and a given search step index. Line 2 returns a code snippet to register a match if the provided index is beyond the index of the final search step. Otherwise, the search step is extracted (line 3) and the variable *matcherCode* to hold the generated code is initialized to an empty string (line 4). Then, if the current search step is an **extend**, it iterates over all free variables (line 6) and generates a series of embedded *for loops* to bind these to the respective candidate model objects selected by the constraint in the step (lines 7-8). Otherwise, the current step is a **check** (line 10) and inserts an *if* condition (lines 11-12). Finally, in line 14, the generation continues recursively appending the code generated from the subsequent steps to the result. The the query code for the entire search plan *sp* can be generated by calling *CompileSearchPlan(sp, 1)*.

Example 3.2. Table 1 shows a possible search plan for the φ_{MT} query. Each row represents a search operation. The first column is the assigned operation number (or step). The second column (Constraint) shows which constraint is enforced by the given step and the third column shows the variables that are already bound by the previous operations when the current operation begins execution. The fourth column shows the search operation type (check or extend) which is based on the variable bindings prior to the execution of the search operation: if the constraint parameters are all bound, then it is a check, otherwise, it is an extend.

Data-driven monitors aim to find matches of graph queries over the entire runtime graph model using a local search-based query evaluation strategy. When such graph queries are used in a real-time system, they need to retrieve all matches of a query in the model by a deadline. This is carried out by using a depth-first search graph traversal algorithm derived from the search plan of the query. This keeps the memory footprint of the algorithm constant, thus only the graph data may change over time as the model evolves.

The operations of the query search plan are translated to structured imperative code:

- Each *extend* operation is either a single assignment to a variable or a *for* loop iterating over a set of candidate variable bindings, depending on the multiplicity of the respective navigation edge (reference constraint).
- Each *check* operation is mapped to an *if* statement that checks whether the current variable binding satisfies a given condition created from the query constraint.

As a result, the source code contains a deep hierarchy of for-loops and if-statements embedded into each other along the ordering of predicates prescribed by the search plan.

Besides obtaining a WCET, we also need to estimate the number of matches of a query to allocate appropriate space in memory in advance. In the case of runtime monitors of safety properties, we can assume that only a few violating matches will be detected [41], thus the query result set is expected to be small and memory required for storing matches can be reserved at compile time.

Example 3.3. Listing 3 shows the C code generated from the query specification of `misalignedTurnout`. Assuming that a global variable `model` points to the root of the entire graph model including its up-to-date model statistics, calling the function `mt_matcher` with a pointer to the result set structure `results` will compute and store all matches over the model in `results`.

In the example, the initially bound variables are assumed to be empty, as indicated in Line 2 (L2 for short) with NULL values, because we aim to find all matches in the entire model. In L3, the size of the result set is initialized to 0. The for loop in L5 represents step 1 from the search plan (see Table 1) and iterates over all turnouts in the model, binding the variable `vars.mt` to all possible objects in L6. Lines 8 and 9 together represent search step 2. In L8, the `vars.loc` is assigned the segment referred by `vars.mt` via the link `straight`. If such a segment exists in L9, execution continues with the third search operation that is mapped to L11–L14.

The generated code for `¬ConnectedTo` (line 3 in Table 1) checks (as negative condition) if the `vars.loc->connected_to` array holds a pointer to the turnout `vars.mt`. The execution only continues if no such reference exists, i.e., `¬ConnectedTo = 1` (see L14). The final step of the search plan is mapped to L16 and L17. Here the train occupying the segment stored in `vars.loc` is assigned to `vars.t`. If such a train exists, a match is found and registered by assigning the corresponding variable values to parameter variables in a new match (L19 and L20) and increasing the counter of found matches `match_cntr`. The execution concludes with saving the number of matches (L25).

When engineering safety-critical software, cyclomatic complexity (CC) is frequently used as a metric to estimate the complexity of the code [40]. As a general recommendation, code with high CC is traditionally avoided in a safety-critical system as it requires extra efforts to test and maintain. However, the derived imperative source code of data-driven monitoring programs is inherently complex even for small queries, which is largely attributed to the declarative nature of query specifications. For example, the CC of Listing 3 is 5, which already indicates substantial complexity. A key contribution of the current paper is to provide novel rigorous timing analysis for data-driven monitors in order to enable their use in a safety-critical context.

4 TIMING ANALYSIS OF QUERY-BASED MONITORS

Estimating the WCET of query-based monitors is a highly complex task which involves multiple classic challenges of timing analysis. First, query programs that take a snapshot of a runtime graph model as their input need to be analyzed. The runtime model of the system is a continuously changing data structure that captures the most up to date knowledge of the underlying running system. As such, *programs with changing memory demands need to be analyzed*, which is considered as a major challenge in the domain of WCET analysis [26]. While the available physical memory of the execution platform sets a de facto upper limit for model size, existing approaches can only provide very coarse estimates based on this parameter, which is often impractical.

Another major challenge is that *query execution time is heavily data-dependent*, i.e. the same control flow of a query program may have substantially different runtimes based upon the structural characteristics of the underlying graph

```

1 void mt_matcher(MTMatchSet *results) {
2   MTVars vars = { mt = NULL, loc = NULL, t = NULL };
3   int match_cnt = 0;
4   // Constraint: Turnout(mt)
5   for(int i0 = 0; i0 < model->turnout_cnt; i0++) {
6     vars.mt = model->nodes[model->turnout_ids[i0]];
7     // Constraint: Straight(mt, loc)
8     vars.loc = mt->straight;
9     if(vars.loc != NULL) {
10      // Constraint: ¬Connected(mt, loc)
11      int is_connected = 0;
12      is_connected |= vars.loc->connected_to[0] == vars.mt;
13      is_connected |= vars.loc->connected_to[1] == vars.mt;
14      if(is_connected == 0) {
15        // Constraint: OccupiedBy(loc, t)
16        vars.t = mt->train;
17        if(vars.t != NULL){
18          // Register match
19          results->matches[match_cnt].mt = vars.mt;
20          results->matches[match_cnt++].t = vars.t;
21        }
22      }
23    }
24  }
25  results->size = match_cnt;
26 }

```

Listing 3. Source code generated for query misalignedTurnout

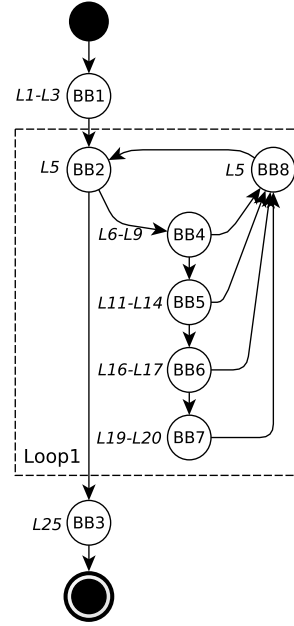


Fig. 5. CFG of mt_matcher




Fig. 6. Classification of query input models and model updates from the perspective of WCET analysis

model. On the one hand, existing static timing analysis approaches fail to provide safe and practical WCET bounds because the longest execution path is often infeasible. Assuming some constraints on model size (e.g. capped by available memory) and some general restrictions on model scope (e.g. there are more segments than trains in any real model), a key open challenge is *how to provide a model where the execution time of a particular query program will likely be maximal* — or at least, sufficiently high to provide a safe WCET estimate.

To tackle this challenge, we introduce the concept of *witness models*, illustrated in Figure 6. Figure 6 sketches the *model space* of runtime graph models (represented with dots), i.e. the set of all monitor inputs. Possible changes made to a model at runtime (depicted as arrows) result in a new model. In order to make a practical WCET estimate for query programs, we make some explicit assumptions about realistic (and consistent) models captured in the form of a *model scope*.

A *witness model* of a model scope (red dots in Figure 6) is a consistent model which *maximizes the WCET estimate for all models within the given scope*. It can serve as representative data to calculate WCET for any model within the scope. If a certain change brings the model outside the given model scope, then the WCET estimate obtained using the witness model from the scope may no longer be safe on the model. In such a case, either the witness model of the new scope

needs to be used (if such witness model is statically available), or a new WCET estimate needs to be recomputed at runtime. The current paper focuses only on how such estimate can be computed, while the technicalities of scheduling and the actual benefits of such on-line estimate are left for future work.

Existing WCET analysis methods. Static WCET analysis is typically divided into two major phases: *flow analysis* and *low-level analysis*. Flow analysis aims at reconstructing the program flow and deriving control flow graphs (CFGs), while low-level analysis aims at computing hardware-specific timing parameters of basic program block (BB) executions. Note that our current work primarily focuses on flow analysis of WCET estimation while low-level WCET analysis is out of scope.

A common flow analysis approach for static WCET computation is the implicit path enumeration technique (IPET) [33]. This method analyzes the control flow of the program to compute a sequence of instructions that yields the longest possible execution. IPET is based on solving an integer linear programming (ILP) problem constructed from the program CFG and flow facts.

The IPET method requires complex computations to solve the underlying ILP problem. As such, it is applicable for design time WCET computation for real-time systems, but not for WCET recomputation at runtime. However, the symbolic method proposed in [4] is capable of providing parametric WCET formulae which are cheap to recompute in case the program flow facts change.

4.1 Overview of the approach

Our approach addresses the WCET estimation challenge for graph query programs by providing *two complementary safe WCET estimation methods*: a *static* one (used at design time) and an *on-line* one (usable at runtime). On the one hand, our static WCET estimation can provide upfront WCET bounds for models within the model scope by synthesizing and exploiting witness models. This estimation achieves tighter WCET bounds (compared to other existing methods) by (1) precisely incorporating data flow information during WCET estimation and by (2) excluding unrealistic models that would often yield high WCET estimates. However, when a runtime model falls outside all model scopes considered at design time, no static WCET estimates are available for the program execution. Therefore, we provide an on-line technique to rapidly recalculate WCET at runtime by adapting parametric WCET formulae [4, 13] and exploiting some aggregated model statistics.

The top part of Figure 7 presents the high-level workflow with design time tasks of obtaining two complementary WCET estimates. The static WCET estimation relies on objective-guided generation of witness models where the objective function is derived from the monitoring goal and the low-level timing properties of the monitoring program. The process starts with the synthesis and compilation of the monitoring program (marked with A in Figure 7), and it is followed by classic WCET analysis, e.g., using the IPET method (B). Subsequently, the results of the WCET analysis are used to compute a model generation objective (C) which drives the model generation process (E). This objective is to maximize the function that computes the execution time of the query program over a given instance model.

In parallel with these activities, constraints are derived for generating well-formed models in the given domain (D). Combining the results from activities C and D, the model generation step (E) uses a graph solver to systematically generate the model that maximizes the objective function, i.e., provides a safe and tight estimation of the longest run time of the query program. As a result, the workflow not only computes a *safe, static WCET value*, but generates a *witness model* where the estimated query program run time is used as the WCET estimation.

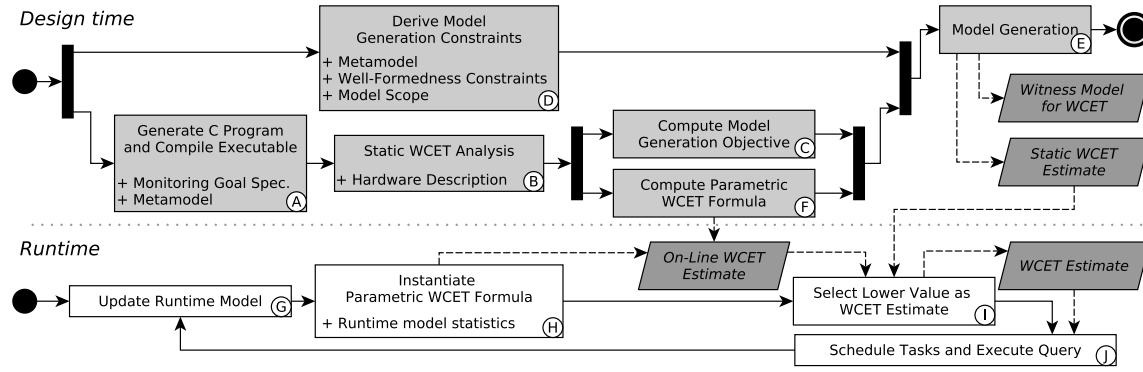


Fig. 7. Workflow of WCET estimation for query-based monitors

The proposed on-line WCET estimation, also shown in Figure 7, starts with obtaining the source code and executable for the query program (A), then performing static WCET analysis (B). Using the results of (B), a parametric WCET formula is derived (F) using the algorithm described in [4]. While obtaining this formula happens at design time, the exact WCET bounds are obtained at runtime once the relevant underlying runtime model statistics are known.

The bottom part of Figure 7 shows the general outline of a program which employs real-time graph queries. Once updates to the runtime model are completed (G), the parametric WCET formula (computed at design time in F) is instantiated and a *safe, on-line WCET bound* is obtained (H). Computing a formula requires minimal computational effort, thus it can be repeatedly recomputed during program execution. The on-line and static WCET bounds, are then simply compared, and because they are both safe estimates, the lower value is selected as WCET estimate (I). If the underlying runtime model lies outside each model scope for which static WCET estimation is available or violates well-formedness constraints, the on-line WCET estimation is selected automatically. This value is then used as the required time window while scheduling of tasks (J), and after completing query evaluation and the rest of the tasks, program execution will eventually continue processing model updates (G).

4.2 Approximating execution time with graph predicates

To characterize the data-dependent execution time of graph query programs, we derive an upper bound function f_q assigning approximate run times of the query q to model M . Formally, $RT_q(M) \leq f_q(M)$, where $RT_q(M)$ is the execution time of the query program q on instance model M .

For each basic block BB_i of the CFG of the query program q , we construct a graph predicate ψ_{BB_i} . The free variables v_1, \dots, v_k of ψ_{BB_i} correspond to the program variables within the program scope when BB_i is executed. When the query program runs on an input model M , each execution of BB_i corresponds to a match $Z: \{v_1, \dots, v_k\} \rightarrow \mathcal{O}_M$ of ψ_{BB_i} ($Z \in \text{Matches}(\psi_{BB_i}, M)$), where $Z(v_j)$ is the model object referenced by the variable v_j upon the execution of BB_i .

To achieve this, we set ψ_{BB_i} to the conjunction of **extend** and **check** constraints in effect on the variables in the program scope. **Extend** operations (evaluated by loops) introduce new free variables, while **check** operations (evaluated by if conditions) only restrict the possible binding of existing variables. As we have shown in Section 3.2, search-based query plans translate to a series of nested loops and if conditions. Thus, ψ_{BB_i} is the conjunction of **extend** constraints associated with loops and **check** constraints associated with if blocks that enclose BB_i . For enclosing else blocks, the negation of the **check** condition is taken instead.

Basic blocks BB_j^* of loop headers require special attention, since a loop variable v_k can be uninitialized or it may have a value from the previous iteration of the loop. Hence, in addition to the predicate $\psi_{BB_j^*}$ with free variables v_1, \dots, v_{k-1}, v_k , we also introduce a predicate $\psi'_{BB_j^*}$ with free variables v_1, \dots, v_{k-1} to represent the first execution with v_k still uninitialized.

Definition 4.1. The upper bound for the execution time of q on a model M can be written using the aforementioned graph predicates by summing up the worst-case execution times of basic blocks weighted by the number of times each basic block is executed as follows:

$$f_q(M) = \sum_{i \in D} (T(BB_i) \cdot |\text{Matches}(\psi_{BB_i}, M)|) + \sum_{j \in L} [T(BB_j^*) \cdot (|\text{Matches}(\psi'_{BB_j^*}, M)| + |\text{Matches}(\psi_{BB_j^*}, M)|)], \quad (1)$$

*total of all BB executions except
loop headers*

*total of initial and repeated loop
header executions*

where

- T is a function that returns the WCET of a basic block in the CFG;
- D is the set of the indices of basic blocks that are not loop headers; and
- L is the set of indices of loops.

The function f_q is a linear function of the match counts of the graph predicates as defined in Section 2.4. Therefore it is not only an upper bound for the execution time of q on a given model M , but may also serve as an objective function in a model generation problem. In Figure 7, the function f_q is defined in activity C and used in activity E.

Example 4.2. We illustrate the execution time estimation method using the query `misalignedTurnout`. To construct the graph predicates ψ_{BB_i} and $\psi'_{BB_j^*}$ for the query program in Listing 3, we have to inspect the query plan in Table 1, its traceability to the generated code (shown as comments in Listing 3), and the CFG of the code (Figure 5). By tracing each basic block to the code lines and to the query constraints, we may obtain

$$\begin{aligned} \psi_{BB_1} &= 1, & \psi_{BB_2} &= \text{Turnout}(mt), & \psi_{BB_3} &= 1, & \psi_{BB_4} &= \text{Turnout}(mt), & \psi_{BB_5} &= \text{Turnout}(mt) \wedge \text{Straight}(mt, loc), \\ \psi_{BB_6} &= \text{Turnout}(mt) \wedge \text{Straight}(mt, loc) \wedge \neg \text{Connected}(mt, loc), \\ \psi_{BB_7} &= \text{Turnout}(mt) \wedge \text{Straight}(mt, loc) \wedge \neg \text{Connected}(mt, loc) \wedge \text{OccupiedBy}(loc, t), & \psi_{BB_8} &= \text{Turnout}(mt). \end{aligned}$$

Since BB_2 is a loop header, we also have $\psi'_{BB_2} = 1$ to account for the first, unconditional execution of BB_2 with the variable mt yet uninitialized. Therefore we can write the upper bound of the execution time on a model M as

$$f_{mt}(M) = \sum_{i=1}^8 (T(BB_i) \cdot |\text{Matches}(\psi_{BB_i}, M)|) + T(BB_2) \cdot |\text{Matches}(\psi'_{BB_2}, M)|.$$

4.3 Witness generation of worst-case execution time

In the static WCET analysis step, we compute an upper bound of the execution time of a model query program given a set of constraints (defining the space of well-formed models) and the scope of the analysis at design time (see activity E in Figure 7).

Given a theory \mathcal{T} and type scopes \mathcal{S} , we derive the WCET estimate of a query program q of the set of models satisfying \mathcal{T} and \mathcal{S} by maximizing the upper bound function f_q .

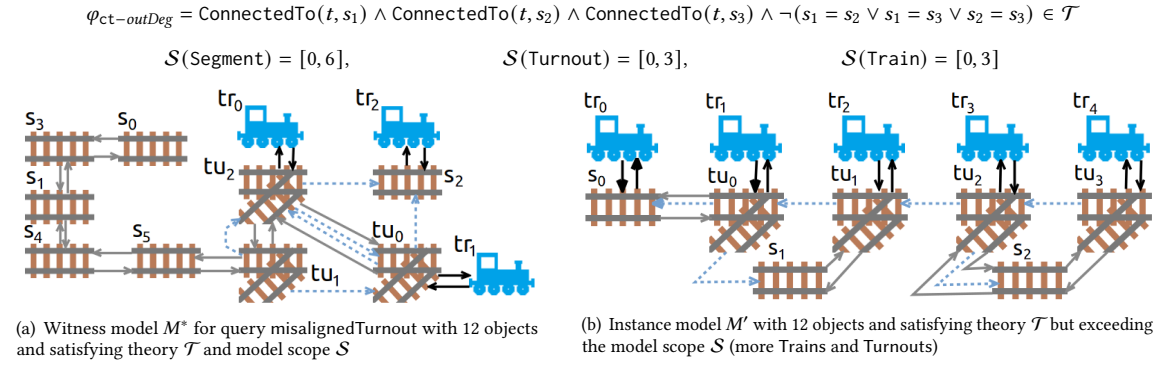


Fig. 8. Illustrating model generation problems for witness models

Definition 4.3. This yields a static WCET estimate $WCET_q^s(\mathcal{T}, \mathcal{S})$ as the computation of this estimate necessitates the use of a model generator at design time. Formally, we have

$$WCET_q^s(\mathcal{T}, \mathcal{S}) = f_q(M^*), \text{ where } M^* \in \text{optimal}(\Sigma, \mathcal{T}, \mathcal{S}, f_q), \quad (2)$$

where M^* is a *witness model* of the maximum value of f_q .

Therefore, $RT_q(M) \leq WCET_q^s(\mathcal{T}, \mathcal{S})$ holds for all instance models $\mathcal{T}, \mathcal{S} \models M$.

We include the witness model M^* (with the used theory \mathcal{T} and model scope \mathcal{S}) for illustration in Figure 8(a) which maximizes f_{mt} and yields the $WCET_{\text{mt}}^s$ estimate for the query program `misalignedTurnout` from Listing 3. The theory \mathcal{T} used in the generation process contained the multiplicity constraint $\varphi_{\text{ct-outDeg}}$ that caps the out-degree of `connectedTo` references at 2.

The witness model M^* can be inspected to study the extreme execution time of the query program q and may aid in further query optimization. However, M^* is not necessarily an input where the actual program WCET is exhibited: it may be the case that $RT_q(M^*) < RT_q(M_{\text{worst}})$ for some other model $\mathcal{T}, \mathcal{S} \models M_{\text{worst}}$, even though we still have $RT_q(M_{\text{worst}}) \leq f_q(M_{\text{worst}}) \leq f_q(M^*) = WCET_q^s(\mathcal{T}, \mathcal{S})$. In any case, our static WCET estimate can serve as a safe bound for execution time.

Gradual refinement of the theory \mathcal{T} and the scopes \mathcal{S} can aid the designer in query program analysis. In particular, if the estimated $WCET_q^s(\mathcal{T}, \mathcal{S})$ is too high, we may extend the set of constraints to $\mathcal{T}' \supseteq \mathcal{T}$ to more precisely specify the space of well-formed models. Alternatively, if it is not feasible to further extend the theory of well-formedness constraints \mathcal{T} and thus restrict the set of well-formed models, we may opt for constraining the model scope \mathcal{S} . This property is summarized Proposition 4.1.

Proposition 4.1. For a query program q , theories $\mathcal{T}, \mathcal{T}'$, and model scopes $\mathcal{S}, \mathcal{S}'$ the following inequality holds (see proof sketch in Appendix A.):

$$WCET_q^s(\mathcal{T}', \mathcal{S}') \leq WCET_q^s(\mathcal{T}, \mathcal{S}) \text{ if } \mathcal{T}' \supseteq \mathcal{T} \text{ and } \forall C_i \in \Sigma: \mathcal{S}'(C_i) \subseteq \mathcal{S}(C_i). \quad (3)$$

4.4 On-line WCET calculation at runtime for graph query programs

The primary goal of on-line WCET estimation computed at runtime is to serve as a fallback to cover cases where the underlying runtime model lies outside the model scope used for computing static WCET bounds or violates well-formedness constraints.

Our idea is to exploit model statistics collected at runtime, such as (1) the number of nodes that are instances of a certain class or (2) the maximum out-degree of a node w.r.t. a given reference type. As discussed in Section 3.1, these model statistics can be collected and maintained as part of the updates to the runtime model. As such, the current values of model statistics can be used as flow facts for loop bounds when instantiating a WCET formula of a specific query. The resulting WCET value can be used to reallocate execution time slots and reschedule tasks on-the-fly [15].

In Section 3.2, we showed how search-based query plans can be translated to a series of embedded loops and if-conditions. Thus, the CFG of such a program has several cycles. We leverage the algorithm presented in [4] that takes a program CFG and outputs a formula where the parameters are loop bounds, i.e., how many times a cycle in the CFG is executed (see activity F in Figure 7).

Definition 4.4. A parametric WCET estimation formula for a graph query program q used to derive WCET bounds at runtime can be defined as follows:

$$WCET_q^0(stats) = \sum_{i \in D_0} T(BB_i) + \sum_{j \in L_0} \left(T(BB_j^*) + l_j(stats) \cdot T(Loop_j, stats) \right) \quad (4)$$

$$T(Loop_j, stats) = \sum_{k \in D_j} T(BB_k) + \sum_{m \in L_j} \left(T(BB_m^*) + l_m(stats) \cdot T(Loop_m, stats) \right) \quad (5)$$

In these formulae

- $stats$ is the model statistics which corresponds to the model scope of a given concrete model;
- l_k returns the loop bound of the k -th loop for a model statistics ($l_k(stats) \in \mathbb{N}$);
- T is a function that returns the WCET of a basic block or loop in the CFG;
- D_0 is the set of BB indices that are not contained in any loops but are part of the longest program execution path in the CFG of the query program q ;
- D_j ($j > 0$) is the set of BB indices contained directly in $Loop_j$ (i.e., not part of other loops) that are part of the longest path within the loop;
- L_0 is the set of loop indices that are not contained in any loop in the CFG of q ;
- L_j ($j > 0$) is the set of loop indices contained directly in $Loop_j$; and
- the BB for loop header of $Loop_j$ is denoted with BB_j^* .

Once $WCET_q^0$ is formulated, it is easy to instantiate it because a multiplication is done for each parameter and then, the timing values are summed up. This computation is simple enough to quickly obtain a new WCET estimate when model statistics are available (activity H in Figure 7).

Example 4.5. Figure 5 shows the CFG built from the `mt_matcher` function with its corresponding BBs. The lines corresponding to BBs in Listing 3 are shown next to the nodes of the CFG. The WCET formula for the `mt_matcher`

function built from the CFG shown in Figure 5 is the following:

$$\begin{aligned} WCET_{mt}^o(stats) &= T(BB_1) + T(BB_3) + \sum_{j \in \{1\}} \left(T(BB_j^*) + l_j(stats) \cdot T(Loop_j) \right) \\ &= T(BB_1) + T(BB_3) + T(BB_2) + l_1(stats) \cdot \left(T(BB_2) + \sum_{k=4}^8 T(BB_k) \right) \end{aligned}$$

Here $T(BB_i)$ is the WCET of a basic block BB_i and the value of $l_1(stats)$ is the flow fact for loop bound, which is in this case the number of turnouts in a given model.

To illustrate the impact of model statistics, we compare the model M^* presented in Figure 8(a) with model statistics $stats_{M^*}$ with the one obtained from a synthetic but still well-formed runtime model snapshot M' shown in Figure 8(b) with model statistics $stats_{M'}$. Both models have a total of 12 nodes but their model statistics (i.e., the number of instances of each class) are different; $stats_{M^*}(\text{Turnout}) = 3$, while for the other model $stats_{M'}(\text{Turnout}) = 4$. For this reason, the query program `mt_matcher` takes longer time to complete when evaluated over M' . The query plan starts with iterating over all turnout nodes, so the $WCET_{mt}^o$ parameter is $l_1(stats_{M^*}) = 3$ for M^* , while $l_1(stats_{M'}) = 4$ for M' .

4.5 Hybrid WCET estimation

We propose a *hybrid* estimation method to leverage both the static and the on-line estimates. For models satisfying the type scopes \mathcal{S} taken into account when calculating the static estimate, the lowest of the two estimates is taken (see activity I in Figure 7). For models outside of \mathcal{S} , we fall back to the on-line estimates.

Definition 4.6. The *hybrid WCET estimate* of a query q over a well-formed runtime model with statistics $stats$ is formally defined by the function

$$WCET_q^h(stats) = \begin{cases} \min\{WCET_q^s(\mathcal{T}, \mathcal{S}), WCET_q^o(stats)\}, & \text{if } \mathcal{S} \models stats, \\ WCET_q^o(stats), & \text{otherwise,} \end{cases} \quad (6)$$

where \mathcal{T} , \mathcal{S} , and the value of $WCET_q^s(\mathcal{T}, \mathcal{S})$ is provided ahead of time.

Computing $WCET_q^h$ only requires the type scope check $\mathcal{S} \models stats$ and the computation of the minimum in addition to the evaluation of the $WCET_q^o$ estimate, both of which can be done in constant time. Thus, there is no significant overhead compared to the $WCET_q^o$ estimate. We may avoid checking whether the current state of the runtime model satisfies \mathcal{T} , since, by assumption, \mathcal{T} is chosen such that all possible runtime models are well-formed.

The static WCET estimate of a query program for some particular scope of models \mathcal{S} may not be tighter than the on-line WCET computed for a model M in the scope. It may be the case that $WCET_q^o(stats_M) \leq WCET_q^s(\mathcal{T}, \mathcal{S})$ even if $\mathcal{T}, \mathcal{S} \models M$, especially when $stats_M$ is much smaller than the $stats_{M^*}$ belonging to the witness model M^* providing the static estimate. We observed this to be the case in two out of four experiments which uses a realistic runtime model (see Section 5.3).

However, for any fixed (well-formed) model M , $WCET_q^s$ computed by $f_q(M)$ is always at least as tight as $WCET_q^o$. Compared to the $WCET_q^o$ estimate, $WCET_q^s$ may take into account the theory \mathcal{T} in addition to the statistics $stats_M$, and f_q also has access to the whole model M . This claim is also confirmed by our experiments (see Section 5.3) and formalized in Proposition 4.2.

Proposition 4.2. The following inequality holds between execution times and their estimates:

$$RT_q(M) \leq f_q(M) \leq WCET_q^s(\mathcal{T}, \widehat{stats_M}) \leq WCET_q^o(stats_M), \quad (7)$$

where $\widehat{stats_M}(C_i) = [stats_M(C_i), stats_M(C_i)]$ is the scope corresponding exactly to the model statistics $stats_M$, i.e., is the scope where the lower and upper bound is equal to the number of elements in the model statistics. See proof sketch in Appendix A.

5 EVALUATION

We conducted experiments to answer the following research questions related to the WCET of query programs:

- RQ1 How do measured query execution times over witness models relate to query execution times over random models?
- RQ2 How do static WCET estimates differ from real query execution times over witness models?
- RQ3 How do static and on-line WCET estimates compare when applied to graph query programs?
- RQ4 How does query program complexity influence the error of computed WCET bounds by various WCET estimation methods?

5.1 Evaluation overview and setup

5.1.1 Queries. To address these research questions, we use graph queries from the domain of the MoDeS3 CPS demonstrator [51]. This demonstrator uses high-level runtime monitoring rules captured as graph queries, and showcases synthesized monitoring programs executing these queries over the runtime graph model of the underlying running system. Our experiments focus only on query evaluation, and updates to the runtime model are out of scope for the current paper. Therefore, we ran the query programs on various snapshots of runtime graph models. We evaluated the following queries adopted from [9]:

- **Close trains (ct):** The headway distance needs to be respected on the track, and this query highlights locations where two trains are only one free segment away from each other.
- **End of siding (eos):** This query finds trains that are dangerously close (one segment distance) to an end of the track.
- **Misaligned turnout (mt):** This is the query introduced in the running example of Section 2.3.
- **Train locations (tl):** A simple query to find pairs of trains and segments that describe the locations of each train.

The calculation of query search plans is out of scope of the current paper, but they were created and optimized based on the typical model statistics of runtime model snapshots in the MoDeS3 system. Although search plans were shown to be highly efficient if they are updated as the properties of the underlying model changes [50], the ones calculated for the realistic model were used throughout the entire evaluation. For example, the search plan presented in Table 1 is the one used by the program executing the query Misaligned turnout.

5.1.2 Graph models. A query program takes a graph as input and computes the query results over this graph. We informally expect that the time needed to compute the complete query result set heavily depends on the structure of the input graph M , which, in our case characterised by the function $stats_M$. In the following, we describe how we obtained a variety of models to assess the impact of models with different characteristics on query evaluation times.

To obtain first one *realistic model*, we manually captured a detailed runtime model snapshot of MoDeS3 that is similar to the one presented in Figure 2(b) and counts a total of 25 objects. Then, using the metamodel in the MoDeS3 case study, we generated *four witness models* for a given model scope such that a chosen query is estimated to have the longest possible execution time. For all of these models, we employed the same model scope inspired by the railway domain: up to one fifth of the objects can be Trains and up to one fifth of the objects can be Turnouts. The rest of the objects are Segments; we capped the maximum number of objects at 25. The resulting models are syntactically valid and they can represent a realistic railway system thanks to the domain-specific model scope and well-formedness constraints.

The second set of models contained a total of 50 *randomly generated graphs* which do not necessarily represent realistic railway configurations. We used an open-source EMF random model generator¹ for this purpose. Nevertheless, these models still respect the same model scope that was used for generating realistic models (i.e., they all contain up to a total of 25 objects, with up to five Turnouts and five Trains) but may violate other constraints of the MoDeS3 domain.

5.1.3 Hardware setup. The query programs were executed on a microcontroller that had no other tasks (e.g., interrupts) running. Because these programs take tens of microseconds to execute, we applied the following measurement setup to obtain an estimate of the average program run times:

1. First we created an infinite loop and observed the loop execute n times under a fixed time duration T_{meas} (in our case $T_{meas} = 1s$).
2. Then, we added query execution to the loop and repeated it 100 over the same graph, and counted m loop executions under T_{meas} .
3. Finally, we used the formula $T_{query} = (\frac{1}{m} - \frac{1}{n}) \cdot 10^4 \mu s$ to get the average run times of query evaluations on given input models.

Repeated measurements of the average program run times obtained this way show negligible variation (in the order of $0.1\mu s$) for a given input graph, which is unsurprising since it is the only task running in the system.

The bare-metal query programs were compiled with the compile flags recommended by OTAWA (this includes using GCC compiler for ARM version 7.2.1 20170904 (release) with `-O0` and `-g3` flags) and they were executed on the Infineon Relax Lite Kit-V1 Board². This board has an XMC4500 F100-K1024 microcontroller and it is driven by a 120MHz system clock. This microcontroller is considered to be a mature industrial microcontroller and has an ARM Cortex-M4 core. For the present evaluation, the available 4KB instruction cache was not used because the initial evaluation results with cache showed that the WCET estimations provided by OTAWA using the available hardware platform model were lower than the measured execution times, which indicates serious issues with estimated WCETs. Not using the instruction cache on the device and removing the cache analysis step from the OTAWA script yielded credible WCET estimations. Besides, the device does not have any data cache. The embedded code used for the experiments as well as compiler and other configurations are available online³.

5.1.4 WCET algorithms and WCET tools. As a baseline for our comparison, we computed a (static) WCET for the query programs with the IPET method [14] using the OTAWA framework [3] (owcet tool version V1.2.0).

To compute $WCET^o$ of query programs, OTAWA derived the program CFG and determined BB execution times from the compiled binary and the hardware platform model. Then, this information was used to compute parametric WCET formulae. Due to the lack of available tool support, we used a semi-automated WCET formulae computation by applying

¹<https://github.com/atlanmod/mondo-atlzoo-benchmark>

²<http://www.infineon.com/xmc-dev>

³<https://imbur.github.io/cps-query/>

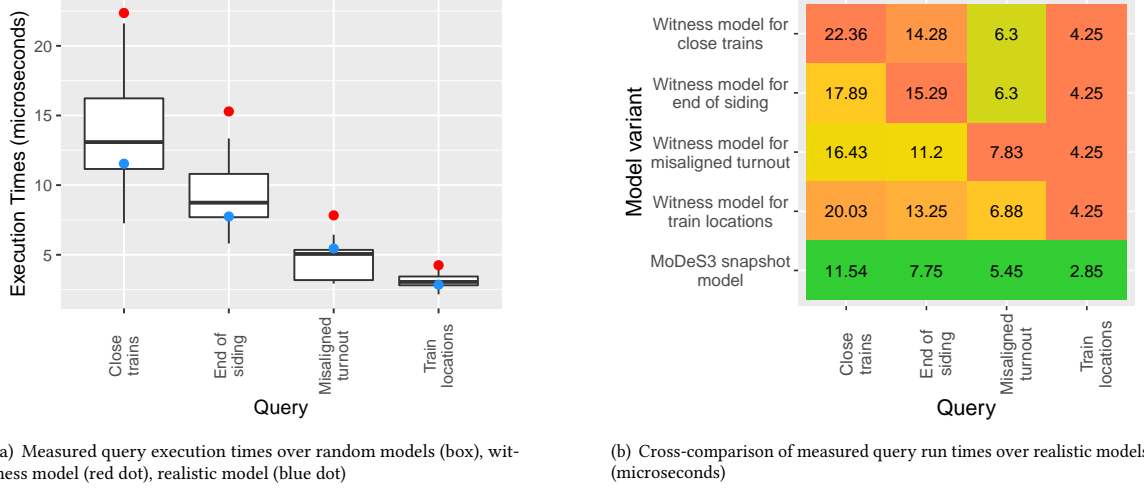


Fig. 9. Query execution times on fully random models and realistic models

the algorithm described by Ballabriga et al. [4]. The platform model of the microcontroller and the OTAWA script was taken from a public repository of an external research group specialized in the analysis of embedded systems⁴.

5.2 Measured query execution times

The measured query run times over the set of 50 randomly generated models is captured by the boxes in Figure 9(a). Each query was evaluated and timed on all of the random models. Additionally, the respective average query execution time over each witness model (generated by the graph solver specifically for a given query) is also added to this figure for comparison (red dots).

The heatmap in Figure 9(b) presents the obtained query run times for each query over all witness models generated by the solver (e.g., Witness model for close trains represents the model that maximizes the estimated run time of the query Close trains) and the realistic model taken from the MoDeS3 system (MoDeS3 snapshot model). The diagonal in this figure shows the measured execution times over models dedicated to maximize the WCET estimation of a corresponding query.

Findings for RQ1. The first observation from Figure 9(a) is that execution times on random models do not exceed the execution time measured on the model generated to maximize the expected execution time of a query. For the almost trivial query Train locations it was possible to achieve the longest measured execution time ($4.25\mu s$) using random generated models, but not for the other three more complex queries. The biggest relative difference was for Misaligned turnout, where the maximum execution time measured for a random model was $6.44\mu s$ and the execution time for the model provided by the graph solver was $7.83\mu s$, a 22% increase. This finding supports the usefulness of deriving *witness models* by graph generation which maximize the estimated WCET.

Another important observation is that execution time is highly sensitive to the structure and statistics of the runtime model. For example, the query Misaligned turnout evaluated over its witness model takes $1.70\times$ longer to complete

⁴<https://github.com/uastw-sat/ARMv7t-WCET-Analysis>

compared to the average execution time over random models, while it takes $2.67\times$ longer compared to the shortest measured execution time over random models. In this case, query execution starts with objects of type Turnout; several random models have less than the maximum amount of Turnout objects allowed by the model scope.

Moreover, we also compare the query execution times over the realistic MoDeS3 runtime model; see the bottom row of Figure 9(b). Here, the results (blue dots) fall within the range of execution times measured over random models. In fact, the relative deviation from the mean is at most 17%.

Finally, we notice that query `trainLocations`, which is a trivial query, exhibits the same execution time for each witness model. This query simply iterates over Trains, and for all other queries there is the same number of Train objects in each generated model.

Findings for RQ2. As a baseline for comparison, we use the execution times presented in the diagonal of the heatmap in Figure 9(b) (i.e., the maximum measured execution times for a query) to approximate the tightness of the static WCET estimate. Since $WCET^s(M^*)$ provides a safe overestimation, the actual WCET of the query program needs to be lower than this value and greater than or equal to the longest measured execution time. We have the following findings:

- $WCET_{ct}^s(M_{ct}^*) = 29.42\mu s$ — up to 32% overestimation of actual WCET
- $WCET_{eos}^s(M_{eos}^*) = 19.58\mu s$ — up to 28% overestimation of actual WCET
- $WCET_{mt}^s(M_{mt}^*) = 11.53\mu s$ — up to 47% overestimation of actual WCET
- $WCET_{t1}^s(M_{t1}^*) = 5.96\mu s$ — up to 40% overestimation of actual WCET

The measured run times over the respective witness models are always below the static WCET estimations by 28%–47%, which means that for each query, the precision of the estimation of the actual WCET over well-formed models of the selected queries is tighter than or equal to these percentages. These numbers show promising first results produced by the approach given that no former WCET estimation methods target this class of data-driven programs.

Summary. Query execution times show a great variation for different models with the same number of objects. As such, the impact of the graph structure on query execution time dominates the impact of sheer model size. For each query, longest execution times were measured over the auto-generated witness models of the query. Our static WCET estimation technique overestimates the actual WCET by a maximum of 28%–47%.

5.3 Assessment of computed WCET

First, query programs were analyzed using the Eclipse plugin for OTAWA to visualize the CFG and obtain the worst-case timing properties of BBs. Additionally, we computed a safe WCET estimation for each query using the IPET plugin for OTAWA with values shown in column *IPET* in Table 2. Since the real model size and metrics are not known at design time, the static WCET estimates by IPET are applicable only to a given model scope. Once the model scope was selected, loop bounds were provided based on the maximum number of object instances allowed by the model scope.

Second, we incorporated the estimated worst-case BB times into the objective function used in the model generation step. The final maximum values provided by the solver are shown in the *Graph solver* column. To see the potential benefit of solver-based static WCET computation, the difference from the IPET-based WCET is shown in parentheses.

Finally, due to the lack of mature tool support, we semi-automatically derived parametric WCET formulae [4] for the four queries from the CFG and BB timing properties computed by OTAWA. Then, we instantiated these formulas with the model statistics of the generated witness models (column *Witness model*) and added the difference to the baseline

Table 2. Comparison of safe WCET estimates over well-formed models with the same model scope (up to five trains, up to five turnouts, and up to a total of 25 objects)

Query	CC	Static estimate (WCET ^s)		On-line estimate (WCET ^o)	
		IPET	Witness generator	Witness model	Realistic model
Close trains	7	34.67 μ s	29.42 μ s (-15%)	35.67 μ s (+3%)	28.68 μ s (-17%)
End of siding	10	24.92 μ s	19.58 μ s (-21%)	25.58 μ s (+1%)	20.61 μ s (-17%)
Misaligned t.	5	11.42 μ s	11.53 μ s (+1%)	11.58 μ s (+1%)	11.58 μ s (+1%)
Train locations	3	5.79 μ s	5.96 μ s (+3%)	5.96 μ s (+3%)	4.91 μ s (-15%)

IPET estimate. Similarly, we used the statistics of the realistic MoDeS3 runtime model to compare the on-line WCET estimate with the one produced by the IPET method. These results are shown in the column *Realistic model*.

Findings for RQ3. Static WCET estimations provided by the graph solver for Misaligned turnout and Train locations queries are higher than the ones obtained by the IPET method by a very thin margin (1% and 3% more, respectively). However, for the other two Close trains and End of siding queries, the provided estimates are significantly lower than the results produced by IPET (15% and 21% less). The explanation is the methods synthesized from these latter two queries have higher program complexity, thus the precise count of BB executions performed by the model generator outweighs the benefits of the IPET method which relies on condensed model statistics provided as flow facts. Overall, this shows the strength of the proposed solver-based WCET estimation method.

The parametric (online) WCET formulae of monitor executions provide slightly higher estimates for each query investigated on witness models when compared to (static) IPET estimates. However, the rapidly recomputable formula provides 15%–17% better estimates in three out of the four cases over the MoDeS3 snapshot realistic model. In case of Misaligned turnout it overestimates the time provided by IPET by only 1%. The reason behind these differences is the runtime model statistics for the MoDeS3 snapshot model has one train less than the maximum number allowed by the model scope, which is a key factor in the formulae of Close trains, End of siding, and Train locations, while the formula for Misaligned turnout does not depend on this number.

Findings for RQ4. On the one hand, static WCET estimates provided using auto-generated witness models have increased precision for more complex queries (complexity measured in cyclomatic complexity – column CC in Table 2). A possible explanation for this lies in how the solver evaluates the objective function (i.e., computes the WCET estimate) over a given graph. Rather than merely relying on program loop bounds, the solver is able to better estimate the exact number of executions of individual BBs while evaluating a query over a given graph.

On the other hand, the computational complexity of queries does not impact the precision of on-line WCET estimations over witness models compared to the estimation obtained by IPET. This result shows the scalability of the on-line WCET computation approach w.r.t. program complexity.

Summary. Static WCET bounds computed by a graph solver can provide significant improvements for complex query-based monitoring programs compared to results obtained from traditional methods. Such static estimates complemented with on-line WCET estimates based on runtime model statistics provide safe and tight execution time bounds. The improvement of WCET bounds of inspected query programs is 13% on average when compared to values obtained by IPET.

5.4 Threats to validity

Computed WCET values presented in this section are reasonable w.r.t. to the measured longest execution times. However, the platform model of the microprocessor may not be completely accurate, which can result in imprecise WCET. Furthermore, the evaluation platform only ran the monitoring programs; no other tasks were running on the same device. Finally, the algorithm for obtaining the parametric WCET formula [4] supports contextual information for refining BB block timings (e.g., the effect of processor pipeline), but our formulae did not use this. For this reason, the formulae we used might provide less tight estimates, but the computed WCET bounds are still safe.

In addition to the hardware-specific considerations, evaluation of the WCET estimation techniques using additional case-studies with query-based runtime monitors from different domains could further improve the confidence in the evaluation results.

6 RELATED WORK

Numerous static and probabilistic WCET analysis methods and surveys exist [32, 52] to provide an extensive summary of their capabilities, while the Abella et al. [2] focus on the comparison of the most common WCET estimation for programs in real-time systems. Based on the categorization of approaches of this latter work, our approach is a *high-level static deterministic timing analysis* which provides *safe* execution bounds for embedded programs executing complex graph queries.

Graph models and queries have been often used in the UML-based design of real-time systems [12, 22, 31]. However, in this work, these techniques are applied at runtime for monitoring purposes in real-time systems, for which only a few related papers exist. We provide an overview of related work below that focuses on topics relevant to query-based monitors.

Dynamic memory allocation in embedded systems. A well-known challenge in programs with dynamic memory needs is the ability to precisely predict the behavior of the memory allocator [53]. In general, allocators do not provide guarantees about the memory addresses reserved at runtime. This makes low-level WCET analysis problematic because there is no information about what cache sets will the newly allocated memory belong to. This way every time a dynamically allocated memory is accessed, the analyzer needs to assume that the all contents of the cache is invalidated. A further issue with using dynamic memory allocation is that the allocator itself is using some internal data structure for tracking in-use memory blocks. This way, whenever an allocation is initiated, the access to these internal data structures pollutes the cache.

A solution in [53] to the nondeterminism of memory allocators is to use deterministic ones instead [27, 35]. Such deterministic allocators are able to provide guarantees regarding the placement of the allocated memory blocks and they serve allocations in $O(1)$ time, but the memory tends to be more fragmented compared to traditional allocators, which may result in poor memory utilization.

Another approach to circumvent the limitations of dynamic allocation is to a priori compute the memory usage of the application [26]. The idea is to allocate memory in advance that the program will need at runtime. This method optimizes the reserved memory size by reusing some data structures multiple times for different purposes at runtime. In this case, however, detailed information is required about the memory needs of the program, which is not always available.

Hard real-time monitors in embedded systems. The concept of *predictable monitoring* was introduced in [54] where static scheduling techniques were used to show that a monitor fits its allocated timeframe. However, this work assumes that the execution times of the monitoring programs are known, which is not true in case of our work. The Temporal Rover [19] opts for generating monitoring code from temporal logic with low overhead. The verification of properties is done mostly on a remote host, only basic sub-formulae evaluation is done on a device and results are communicated to the host. Synchronous component execution and observable program states are the main assumptions made in [39] to support sampling-based monitoring of real-time systems. This work follows a standard model of hard real-time scheduling, where monitors are a collection of recurring tasks that obtain inputs and compute output in a priori-bounded amount of time, which is different from our presented dynamically changing time windows for query-based monitors.

Real-time database queries. In real-time databases [37], access to data has strict time constraints. The work in [29] presents a data sampling-based statistical method to evaluate aggregate queries in a database. There is a trade-off between time available for query execution and the precision of the estimate. Such estimations would not be acceptable in a monitoring setting where precise query results are expected. The real-time object-oriented database RODAIN [46], which targets telecommunication applications, does not support *hard real-time* transaction (i.e., query) types, because it is considered too costly for the target domain. However, our objective is exactly to provide such guarantees over graph models to support hard real-time applications.

WCET of graph model-based computations. One of the few related works that investigates real-time properties of graph-based techniques is [48]. This work evaluates the applicability of *story diagrams* to recognize hazardous situations in real-time systems. Story diagrams are especially suitable for event-driven data transformations, which differs from our data-driven approach. Another important assumption in this work is the limited model size on which story diagrams are applied. This differs significantly from our setup, because we allow the model not to be bounded at design time.

7 CONCLUSIONS AND FUTURE WORK

In this paper, we presented a method to *provide safe and practical WCET bounds for runtime monitoring programs derived from graph queries* to enable their use in real-time systems. On the one hand, we provide a static WCET estimate by exploiting automatically generated witness models (using an advanced graph solver) which maximize the execution time taken by the query-based monitor to complete. On the other hand, we combine state-of-the-art parametric WCET computation with runtime graph statistics to allow online WCET recomputation at runtime upon relevant model changes to enable to reallocate time slots to a tighter bound.

We carried out extensive evaluation of our approach on an industry-grade hardware platform using a variety of graph models as inputs for query programs, and assessed the tightness of computed WCET using three different algorithms. We managed to construct witness models for highest estimated execution times of queries as well as random graph models as inputs for graph query programs as an attempt to showcase high execution times. While we have no formal guarantee that worst-case timing behavior is exhibited on witness models as inputs, in all our experiments, the longest execution times were always measured on such witness models.

Our results showed that our proposed WCET estimation approach often provides tighter estimates than the classic IPET method. Moreover, the actual structure of the underlying graph has a major impact on query execution time (we experienced a 3.08× multiplier between shortest and longest measured execution in an extreme case) and it is a more important factor than the sheer model size.

Since our current technique relies on fixed worst-case timings for basic program blocks to yield a safe but conservative estimate, our future work aims to improve on tightness by incorporating context-dependent basic block execution times. Moreover, the assessment of benefits of the on-line computed WCET in scheduling is subject to future investigations.

As a part of a long-term future research agenda, the presented WCET estimation approach could be extended to a distributed setting. In addition to the characteristics of the graph model, query evaluation costs need to take into account network latency and data allocation.

REFERENCES

- [1] Raja Ben Abdesslem, Annibale Panichella, Shiva Nejati, Lionel C. Briand, and Thomas Stifter. 2018. Testing Autonomous Cars for Feature Interaction Failures Using Many-Objective Search. In *33rd ACM/IEEE International Conference on Automated Software Engineering*. 143–154.
- [2] Jaume Abella et al. 2015. WCET analysis methods: Pitfalls and challenges on their trustworthiness. *10th IEEE International Symposium on Industrial Embedded Systems - Proceedings* (2015), 39–48.
- [3] Clément Ballabriga, Hugues Cassé, Christine Rochange, and Pascal Sainrat. 2010. OTAWA: An Open Toolbox for Adaptive WCET Analysis. In *LNCS*. Vol. 6399.
- [4] Clément Ballabriga, Julien Forget, and Giuseppe Lipari. 2017. Symbolic WCET computation. *ACM Trans. Embedded Comput. Syst.* 17, 2 (2017).
- [5] Ezio Bartocci et al. 2018. Specification-Based Monitoring of Cyber-Physical Systems: A Survey on Theory, Tools and Applications. In *Lectures on Runtime Verification*. 135–175.
- [6] Gábor Bergmann, Zoltán Ujhelyi, István Ráth, and Dániel Varró. 2011. A Graph Query Language for EMF Models. In *Theory and Practice of Model Transformations - 4th International Conference*. 167–182.
- [7] Gordon S. Blair, Nelly Bencomo, and Robert B. France. 2009. Models@run.time. *IEEE Computer* 42, 10 (2009), 22–27.
- [8] Erwan Brottier, Franck Fleurey, Jim Steel, Benoit Baudry, and Yves Le Traon. 2006. Metamodel-based test generation for model transformations: an algorithm and a tool. In *2006 17th International Symposium on Software Reliability Engineering*. 85–94.
- [9] Márton Búr, Gábor Szilágyi, András Vörös, and Dániel Varró. 2018. Distributed graph queries for runtime monitoring of cyber-physical systems. In *LNCS*. Vol. 10802. 111–128.
- [10] Márton Búr, Gábor Szilágyi, András Vörös, and Dániel Varró. 2019. Distributed graph queries over models@run.time for runtime monitoring of cyber-physical systems. In *Int. J. Software Tools Technol. Trans.* 111–128.
- [11] Márton Búr and Dániel Varró. 2019. Towards WCET Estimation of Graph Queries@Run.time. In *ACM/IEEE 22nd International Conference on Model Driven Engineering Languages and Systems*. 233–238.
- [12] Sven Burmester, Holger Giese, Martin Hirsch, and Daniela Schilling. 2004. Incremental design and formal verification with UML/RT in the FUJABA real-time tool suite. In *Proceedings of the International Workshop on Specification and Validation of UML Models for Real Time and Embedded Systems, SVERTS2004, Satellite Event of the 7th International Conference on the Unified Modeling Language, UML*. Citeseer.
- [13] Stefan Bygde, Andreas Ermedahl, and Björn Lisper. 2011. An efficient algorithm for parametric WCET calculation. *J. Syst. Archit.* 57, 6 (2011), 614–624.
- [14] Hugues Cassé and Pascal Sainrat. 2006. OTAWA, a framework for experimenting WCET computations. *3rd European Congress on Embedded Real-Time* January (2006), 1–8.
- [15] H. Chetto, M. Silly, and T. Bouchentouf. 1990. Dynamic scheduling of real-time tasks under precedence constraints. *Real-Time Systems* 2, 3 (1990), 181–194.
- [16] Kong-Rim Choi and Kyung-Chang Kim. 1996. T*-tree: a main memory database index structure for real time applications. In *3rd International Workshop on Real-Time Computing Systems and Applications*. 81–88.
- [17] István Dávid, István Ráth, and Dániel Varró. 2018. Foundations for Streaming Model Transformations by Complex Event Processing. *Softw. Syst. Model.* 17, 1 (2018), 135–162.
- [18] Wei Dou, Domenico Bianculli, and Lionel Briand. 2018. Model-Driven Trace Diagnostics for Pattern-Based Temporal Specifications. In *21th ACM/IEEE International Conference on Model Driven Engineering Languages and Systems*. 278–288.
- [19] Doron Drusinsky. 2000. The temporal rover and the ATG rover. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* 1885 (2000), 323–330.
- [20] Franck Fleurey, Jim Steel, and Benoit Baudry. 2004. Validation in model-driven engineering: testing model transformations. In *Proceedings. 2004 First International Workshop on Model, Design and Validation*, 2004. 29–40.
- [21] Brian Gallagher. 2006. Matching structure and semantics: A survey on graph-based pattern matching. *AAAI FS* 6 (2006), 45–53.
- [22] Holger Giese, Matthias Tichy, Sven Burmester, Wilhelm Schäfer, and Stephan Flake. 2003. Towards the compositional verification of real-time UML designs. *Proceedings of the ACM SIGSOFT Symposium on the Foundations of Software Engineering* (2003), 38–47. <https://doi.org/10.1145/940071.940078>
- [23] Thomas Hartmann, François Fouquet, Assaad Moawad, Romain Rouvoy, and Yves Le Traon. 2019. GREYCAT: Efficient what-if analytics for data in motion at scale. *Information Systems* 83 (2019), 101–117.
- [24] Klaus Havelund. 2015. Rule-based runtime verification revisited. *Int. J. Software Tools Technol. Trans.* 17, 2 (2015), 143–170.

- [25] Klaus Havelund and Grigore Rosu. 2002. Synthesizing Monitors for Safety Properties. In *LNCS*. Vol. 2280. 342–356.
- [26] Jörg Herter and Jan Reineke. 2009. Making Dynamic Memory Allocation Static to Support WCET Analysis. In *9th International Workshop on Worst-Case Execution Time Analysis (WCET'09)*.
- [27] Jörg Herter, Jan Reineke, and Reinhard Wilhelm. 2008. CMA: Cache-aware memory allocation for WCET analysis. In *Work-In-Progress Session of the 20th Euromicro Conference on Real-Time Systems*.
- [28] Ákos Horváth, Gergely Varró, and Dániel Varró. 2007. Generic search plans for matching advanced graph patterns. *Electronic Communications of the EASST* 6 (2007).
- [29] Wen-Chi Hou, Gultekin Ozsoyoglu, and Baldeo K. Taneja. 1989. Processing Aggregate Relational Queries with Hard Time Constraints. *SIGMOD Rec.* (1989), 10.
- [30] Muhammad Zohaib Iqbal, Shaikat Ali, Tao Yue, and Lionel Briand. 2015. Applying UML/MARTE on industrial projects: challenges, experiences, and guidelines. *Softw. Syst. Model.* 14, 4 (2015), 1367–1385.
- [31] Jan Jürjens. 2003. Developing safety-critical systems with UML. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* 2863 (2003), 360–372. https://doi.org/10.1007/978-3-540-45221-8_31
- [32] V. P. Kozhyrev. 2016. Estimation of the execution time in real-time systems. *Programming and Computer Software* 42, 1 (2016), 41–48.
- [33] Y.-T.S. Li and Sharad Malik. 1997. Performance analysis of embedded software using implicit path enumeration. *IEEE T. Comput. Aid. D.* 16, 12 (1997), 1477–1487.
- [34] Kristóf Marussy, Oszkár Semeráth, and Dániel Varró. 2018. Incremental view model synchronization using partial models. *Proceedings - 21st ACM/IEEE International Conference on Model Driven Engineering Languages and Systems, MODELS 2018* (2018), 323–333.
- [35] Miguel Masmano, Ismael Ripoll, Alfons Crespo, and Jorge Real. 2004. TLSF: A new dynamic memory allocator for real-time systems. In *16th Euromicro Conference on Real-Time Systems*. 79–88.
- [36] Joseph D McDonald and Francis T Durso. 2015. A behavioral intervention for reducing postcompletion errors in a safety-critical system. *Human factors* 57, 6 (2015), 917–929.
- [37] Gultekin Ozsoyoglu and Richard T Snodgrass. 1995. Temporal and real-time databases: A survey. *IEEE Trans. Knowl. Data Eng.* 7, 4 (1995).
- [38] Christian Pék, Stefanie Manzing, Markus Koschi, and Matthias Althoff. 2020. Using online verification to prevent autonomous vehicles from causing accidents. *Nature Machine Intelligence* 2, 9 (sep 2020), 518–528. <https://doi.org/10.1038/s42256-020-0225-y>
- [39] Lee Pike, Alwyn Goodloe, Robin Morisset, and Sebastian Niller. 2010. Copilot: A Hard Real-Time Runtime Monitor. In *LNCS*. Vol. 6418. 345–359.
- [40] Leanna Rierison. 2017. *Developing Safety-Critical Software*. CRC Press. 22–27 pages.
- [41] Oszkár Semeráth, Rebeka Farkas, Gábor Bergmann, and Dániel Varró. 2020. Diversity of graph models and graph generators in mutation testing. *International Journal on Software Tools for Technology Transfer* 22, 1 (2020), 57–78.
- [42] Oszkár Semeráth, András Szabolcs Nagy, and Dániel Varró. 2018. A graph solver for the automated generation of consistent domain-specific models. In *40th International Conference on Software Engineering*. 969–980.
- [43] Oszkár Semeráth and Dániel Varró. 2017. Graph Constraint Evaluation over Partial Models by Constraint Rewriting. In *ICMT 2017*. 138–154.
- [44] Oszkár Semeráth, András Vörös, and Dániel Varró. 2016. Iterative and incremental model generation by logic solvers. In *International Conference on Fundamental Approaches to Software Engineering*. Springer, 87–103.
- [45] Michael Szvetits and Uwe Zdun. 2013. Systematic literature review of the objectives, techniques, kinds, and architectures of models at runtime. *Software & Systems Modeling* 15, 1 (2013), 31–69.
- [46] Juha Taina and Kimmo Raatikainen. 1996. Rodain: A real-time object-oriented database system for telecommunications. *International Conference on Information and Knowledge Management, Proceedings Part F129290* (1996), 10–14.
- [47] The Eclipse Project [n.d.]. *Eclipse Modeling Framework*. The Eclipse Project. eclipse.org/emf.
- [48] Matthias Tichy, Holger Giese, and Andreas Seibel. 2006. Story diagrams in real-time software. In *Proc. of the 4th International Fujaba Days*.
- [49] Dániel Varró, Oszkár Semeráth, Gábor Szárnyas, and Ákos Horváth. 2018. *Towards the Automated Generation of Consistent, Diverse, Scalable and Realistic Graph Models*. Number 10800.
- [50] Gergely Varró, Frederik Deckwerth, Martin Wieber, and Andy Schürr. 2015. An algorithm for generating model-sensitive search plans for pattern matching on EMF models. *Software & Systems Modeling* (2015), 597–621.
- [51] András Vörös et al. 2018. MoDeS3: Model-Based Demonstrator for Smart and Safe Cyber-Physical Systems. In *NASA Formal Methods*. 460–467.
- [52] Reinhard Wilhelm et al. 2008. The Determination of Worst-Case Execution Times: Overview of the Methods and Survey of Tools. *ACM Trans. Embedded Comput. Syst.* 7, 3 (2008), 36:1–36:53.
- [53] Reinhard Wilhelm et al. 2010. Static Timing Analysis for Hard Real-Time Systems. In *Verification, Model Checking, and Abstract Interpretation*.
- [54] Haitao Zhu, Matthew B. Dwyer, and Steve Goddard. 2009. Predictable runtime monitoring. *Proceedings - Euromicro Conference on Real-Time Systems* 2 (2009), 173–183.

A PROOF SKETCHES

Proposition Proposition 4.1. For a query program q , theories $\mathcal{T}, \mathcal{T}'$, and model scopes $\mathcal{S}, \mathcal{S}'$ the following inequality holds:

$$\text{If } \mathcal{T}' \supseteq \mathcal{T} \text{ and } \forall C_i \in \Sigma: \mathcal{S}'(C_i) \subseteq \mathcal{S}(C_i) \text{ then } WCET_q^s(\mathcal{T}', \mathcal{S}') \leq WCET_q^s(\mathcal{T}, \mathcal{S}).$$

PROOF. (Sketch.) Let $\mathcal{M} = \{M : \mathcal{T}, \mathcal{S} \models M\}$ be the set of well-formed (WF) models in the model scope. It is sufficient to show that $\mathcal{M}' = \{M : \mathcal{T}', \mathcal{S}' \models M\} \subseteq \mathcal{M}$ since the witness model $M^* \in \mathcal{M}$ provides the longest estimated execution. Therefore, we have to consider the following two cases: (1) $\mathcal{T}' \supseteq \mathcal{T}, \mathcal{S}' = \mathcal{S}$ and (2) $\mathcal{T}' = \mathcal{T}, \mathcal{S}' \subsetneq \mathcal{S}$

1. Assume $\mathcal{T}' \supseteq \mathcal{T}, \mathcal{S}' = \mathcal{S}$, i.e., there is at least one additional WF constraint added to the theory of WF constraints, but the scope remains the same. The addition of a new WF constraint cannot invalidate existing constraints, i.e., $\forall M : \mathcal{T}', \mathcal{S} \models M \rightarrow \mathcal{T}, \mathcal{S} \models M$.
2. Assume $\mathcal{T}' = \mathcal{T}, \mathcal{S}' \subsetneq \mathcal{S}$, i.e., there is at least one $C_i \in \Sigma$ such that $\mathcal{S}'(C_i) \subsetneq \mathcal{S}(C_i)$ and the theory of WF constraints remains the same. For the witness model $\mathcal{T}, \mathcal{S} \models M^*$, it is true that $stats_{M^*}(C_i) \in \mathcal{S}(C_i)$. If $stats_{M^*}(C_i) \notin \mathcal{S}'(C_i)$, the witness model $\mathcal{T}, \mathcal{S}' \models M^{**}$ need to yield a lower WCET estimate, otherwise it would have been included in the optimal solution using \mathcal{T}, \mathcal{S} .

□

Proposition Proposition 4.2. The following inequality holds between execution times and their estimates:

$$RT_q(M) \leq f_q(M) \leq WCET_q^s(\mathcal{T}, \widehat{stats_M}) \leq WCET_q^o(stats_M),$$

where $\widehat{stats_M}(C_i) = [stats_M(C_i), stats_M(C_i)]$ is the scope corresponding exactly to the model statistics $stats_M$.

PROOF. (Sketch.) We show that the following three inequalities hold:

1. $RT_q(M) \leq f_q(M)$
2. $f_q(M) \leq WCET_q^s(\mathcal{T}, \widehat{stats_M})$
3. $WCET_q^s(\mathcal{T}, \widehat{stats_M}) \leq WCET_q^o(stats_M)$

1. The function f_q precisely counts the BB executions of the query program q over model M , and multiplies this number by the execution time of the BB. Furthermore, we use the longest possible estimated execution times of BBs when defining f_q . Therefore, $RT_q(M) \leq f_q(M)$ holds.

2. The definition of $WCET_q^s$ is to compute the value of f_q for the witness model M^* , which maximizes the value returned by this function. This means that for any model with the same statistics as M , $f_q(M) \leq WCET_q^s(\mathcal{T}, \widehat{stats_M})$ holds.

3. The formula which defines $WCET_q^o(stats_M)$ sums BB execution times based on program control flow, and $stats_M$ provides the flow facts for setting maximum loop bounds. These flow facts inherently overestimate execution counts in cases where there is a variation in actual loop repetitions since it will assume the number of maximum repetitions. On the contrary, $WCET_q^s(\mathcal{T}, \widehat{stats_M})$ will precisely count how many times a BB is executed if a query is evaluated over model M . This proves that the inequality $WCET_q^s(\mathcal{T}, \widehat{stats_M}) \leq WCET_q^o(stats_M)$ holds.

□